

# Good things come in small packages

AQ1000  
Optical Time Domain Reflectometer

Precision Making

Bulletin AQ1000-01EN



# Empower field technicians to make fast and precise measurements

## At-a-glance


The AQ1000 satisfies test and measurement needs in analyzing access optical networks.

- **Wavelengths:** 1310 / 1550 nm
- **Dynamic ranges:** 32 / 30 dB
- **Size:** 185 mm (W) × 116 mm (H) × 56 mm (D)
- **Weight:** 660 g

## Multi-touch touchscreen

### Intuitive and responsive


Tap, swipe, pinch or press. the high resolution, responsive 5.0-inch multi-touch capacitive touchscreen and hard-key buttons make OTDR operations simple and intuitive.

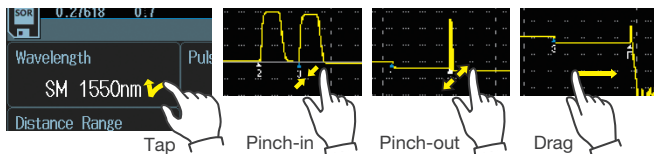

## One-button measurement


### Full-Auto

Simply pressing one single button, the AQ1000 initiates an OTDR measurement, detects and comprehensively characterizes network events with PASS/FAIL judgment based on user-defined thresholds. The measurement data can be saved automatically if desired.

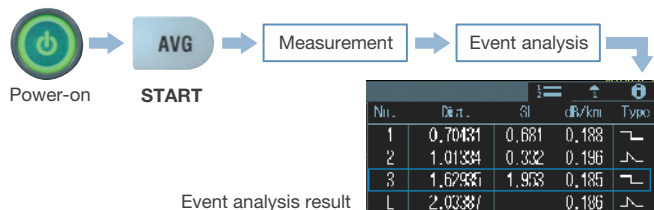

### Real-Time


Simple and fast way to observe how the network connection looks like and make a Pass/Fail judgment of the network connection. The markers enables distance and loss measurements.

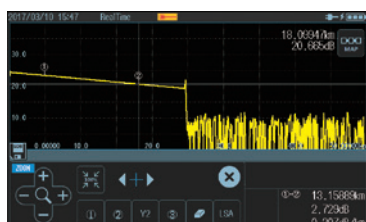

## OTDR view modes


### Trace view

Traditional view with OTDR waveforms and event markers.

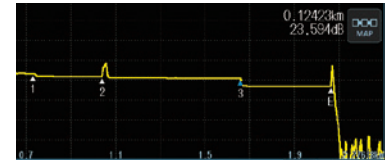

### Map view

Simple, icon-based map view for easy interpretation of network events.

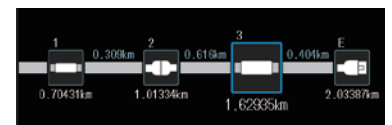

## Long battery operation time

### Over 10 hours!

No worrying about running out of battery power during your daily work. The AQ1000's high capacity Li-Ion battery will last for 10 hours under the Telcordia standard conditions.

## Quick boot-up

### Under 10 seconds!

From completely OFF to measurement ready in under 10 seconds!

## Built-in PC and LS, and VLS

### Power checker (PC)


Measures and displays optical power of incoming light for testing network performance.



Power checker (PC)

### Light source (LS)

Outputs a stable, continuous wave/modulated light for measuring end-to-end attenuation accurately when paired with an optical power sensor.



Light source (LS)

### Visible light source (VLS)

Outputs red light for checking continuity of launch fibers or short fiber trunks. Breaks and bending in fiber can be identified visually.

(VLS option is required.)



Visible light source (VLS)

## Data handling features

### Direct data saving

Simply pressing “Direct save” icon, measured data can be saved in SOR or PDF format according to users’ prior selection.




### PDF reporting

Built-in post-processing software for generating OTDR reports in PDF format. Flexible configuration of report template to meet users’ report requirements.



### Data Transfer

Data files or PDF report files that are stored in the AQ1000 can easily be transferred to a PC through a USB connection.

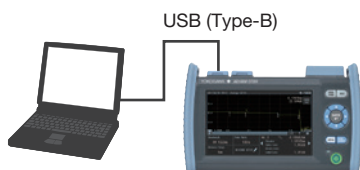

## Wireless LAN (soon-to-be-released)

The AQ1000 is capable of data transfer and remote control in cooperation with wireless LAN capable devices.



### Wireless data transfer

The AQ1000's data files can be transferred to a smartphone or tablet using the OTDR data transporter, or to PC using the OTDR Remote Controller software.

### Remote control

The AQ1000 can be controlled remotely by a smartphone or tablet using a web browser and by a PC using a web browser or the OTDR remote controller.


Note.

/WLN option is required. Please consult with our sales representatives for availability in your country.

The OTDR Data Transporter and the OTDR Remote Controller are a free application software.

## Interfaces

- 1 USB port (Type micro B)
- 2 USB port (Type A)
- 3 5.0-inch color LCD with capacitive touch-screen
- 4 VLS port (option)
- 5 OTDR port
- 6 Keys

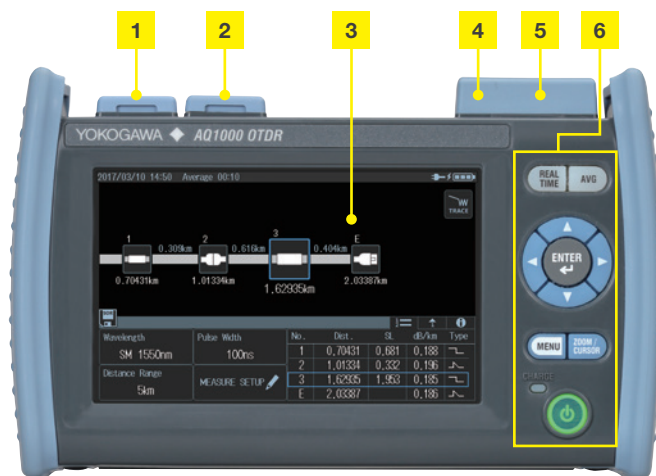

## USB power feeding

USB port is used for charging the battery of AQ1000. No need to carry a bulky AC adapter anymore.

Note.

A USB power adapter is not included. Please consult with our sales representatives for Yokogawa approved USB power adapters.



## Multi language

Selection of display languages to assist users in operating the AQ1000 in their native language.

## Measurement functions

- Distance measurement
- Loss measurement
- Return loss measurement (Total/Section)
- Auto event search
- Pass/Fail judgment

Major specifications

OTDR

Items	Specifications
Wavelength (nm)*4	1310 ±20/1550 ±20
Applicable fiber	SM (ITU-T G.652)
Distance range (km)	0.2, 0.5, 1, 2, 5, 10, 20, 30, 50, 100, 200, 256
Pulse width (ns)	3, 10, 20, 30, 50, 100, 200, 300, 500, 1000, 2000, 5000, 10000, 20000
Sampling resolution	min. 5 cm
Number of sample points	max. 256000
Distance measurement accuracy (m)	±(1 m + Measurement distance × 2 × 10 <sup>-5</sup> ±1 sampling resolution)
Event dead zone (m)*1	≤ 0.8
Attenuation dead zone (m)*2, *4	4/5
Dynamic range (dB)*3, *4	32/30
Loss measurement accuracy	±0.03 dB/dB
Reflection accuracy	±2 dB
Laser class	Class 1M

\*1: Pulse width = 3 ns, Return loss ≥ 55 dB, at a 1.5 dB or less point from an unsaturated peak level. \*2: Pulse width = 10 ns, Return loss ≥ 55 dB, at a point where the backscatter level is within ±0.5 dB of the normal level. \*3: Pulse width = 10000 ns, Measurement time = 3 minutes, Sampling resolution = 8 m, SNR = 1. \*4: typical

General specifications

Items	Specifications						
Display*	5.0 inch color TFT LCD WVGA (Capacitive touchscreen) Resolution: 800 × 480 pixel						
External interfaces	USB2.0 × 2 Type A × 1: Host, Type micro B × 1: USB mass storage devices, DC power supply Wireless LAN (WLAN option): IEEE802.11b/g/n						
Dimensions	185 mm (W) × 116 mm (H) × 56 mm (D) (excluding projections)						
Weight	Approx. 660 g						
Environmental conditions	<table><tr><td>Temperature</td><td>Operating: -10°C to 50°C, (10 to 35°C during charging, excluding a USB power adapter) (0 to 50°C when WLAN using) Storage: -20°C to 60°C</td></tr><tr><td>Humidity</td><td>5 to 90%RH (No condensation)</td></tr><tr><td>Altitude</td><td>4000 m or less</td></tr></table>	Temperature	Operating: -10°C to 50°C, (10 to 35°C during charging, excluding a USB power adapter) (0 to 50°C when WLAN using) Storage: -20°C to 60°C	Humidity	5 to 90%RH (No condensation)	Altitude	4000 m or less
Temperature	Operating: -10°C to 50°C, (10 to 35°C during charging, excluding a USB power adapter) (0 to 50°C when WLAN using) Storage: -20°C to 60°C						
Humidity	5 to 90%RH (No condensation)						
Altitude	4000 m or less						
Power requirements	DC 5 V±10%, max. 1.5 A						
Battery	<table><tr><td>Type</td><td>Lithium ion polymer</td></tr><tr><td>Operating time</td><td>10 hours or more (Telcordia GR-196-CORE Issue 2, September 2010)</td></tr><tr><td>Recharge time</td><td>5 hours (typical)</td></tr></table>	Type	Lithium ion polymer	Operating time	10 hours or more (Telcordia GR-196-CORE Issue 2, September 2010)	Recharge time	5 hours (typical)
Type	Lithium ion polymer						
Operating time	10 hours or more (Telcordia GR-196-CORE Issue 2, September 2010)						
Recharge time	5 hours (typical)						
Safety standard	EN61010-1						
Laser safety	IEC/EN 60825-1:2007, GB7247.1-2012, FDA 21CFR1040.10 and 11						
EMC	<table><tr><td>Emission</td><td>EN 61326-1 Class A, EN 55011 Class A Group1</td></tr><tr><td>Immunity</td><td>EN 61326-1 Table2</td></tr></table>	Emission	EN 61326-1 Class A, EN 55011 Class A Group1	Immunity	EN 61326-1 Table2		
Emission	EN 61326-1 Class A, EN 55011 Class A Group1						
Immunity	EN 61326-1 Table2						
Wireless	<table><tr><td>Wireless LAN (option)</td><td>EN300 328 V2.1.1, EN301 489-1 and 17</td></tr></table>	Wireless LAN (option)	EN300 328 V2.1.1, EN301 489-1 and 17				
Wireless LAN (option)	EN300 328 V2.1.1, EN301 489-1 and 17						



\*The LCD may contain some pixels that are always ON or OFF (0.002% or fewer of all displayed pixels including RGB), but this is not indicative of a general malfunction.

**Yokogawa's approach to preserving the global environment**

- Yokogawa's electrical products are developed and produced in facilities that have received ISO14001 approval.
- In order to protect the global environment, Yokogawa's electrical products are designed in accordance with Yokogawa's Environmentally Friendly Product Design Guidelines and Product Design Assessment Criteria.



**YOKOGAWA METERS & INSTRUMENTS CORPORATION**  
Global Sales Dept. /Phone: +81-422-52-6237 E-mail: tm@cs.jp.yokogawa.com  
Facsimile: +81-422-52-6462

**YOKOGAWA CORPORATION OF AMERICA**  
**YOKOGAWA EUROPE B.V.**  
**YOKOGAWA SHANGHAI TRADING CO., LTD.**  
**YOKOGAWA ELECTRIC KOREA CO., LTD.**  
**YOKOGAWA ENGINEERING ASIA PTE. LTD.**  
**YOKOGAWA INDIA LTD.**  
**YOKOGAWA ELECTRIC CIS LTD.**  
**YOKOGAWA AMERICA DO SUL LTDA.**  
**YOKOGAWA MIDDLE EAST & AFRICA B.S.C(c)**

Phone: +31-88-4641000  
Phone: +86-21-6239-6363  
Phone: +82-2-2628-3810  
Phone: +65-6241-9933  
Phone: +91-80-4158-6396  
Phone: +7-495-737-78-68  
Phone: +55-11-5681-2400  
Phone: +973-17-358100

Power checker function

Items	Specifications
Wavelength setting (nm)	1310/1490/1550/1625/1650
Measurement range (dBm)	-50 to -5
Measurement accuracy (dB)*	±0.5

\* CW, 1310 nm (with a spectral width of 10 nm or less), Optical input power 100 μW (-10 dBm), SM fiber (ITU-T G.652) with FC/PC connector, Wavelength setting: Measured wavelength ±0.5 nm, Excluding a secular change of equipment. (add 1% one year after calibration.)

Stabilized light source function

Items	Specifications
Wavelength (nm)	1310 ±25/1550 ±25
Optical output level	-3 dBm ±1 dB
Output power stability (dB) *	±0.05
Modulation mode	CW, 270 Hz, 1 kHz, 2 kHz
Laser class	Class 1M

\* for 5 minutes at a constant ambient temperature within 23°C ±2°C.

Visible light source function (VLS option)

Items	Specifications
Wavelength (nm)	650 ±20
Optical output level	-3 dBm or more (Peak)
Modulation mode	CW, 2 Hz
Laser class	Class 3R

Note.  
All the specifications are valid at 23°C ±2°C and after a warming up for 5 minutes or more, unless otherwise stated.

Model and suffix code

Model	Suffix codes	Descriptions
AQ1000		AQ1000 OTDR
Optical connector	-USC	Universal Adapter (SC)
	-UFC	Universal Adapter (FC)
Visible light source	/VLS	Visible Light Source
Wireless LAN*	/WLN	Wireless LAN (soon to be released)

\*The use of wireless LAN is subject to the regulation of each country. For more detail, please consult with our sales representatives.

Accessories (Sold separately)

Names	Models	Descriptions
Universal adapter	735482-FCC 735482-SCC	for OTDR port (FC) for OTDR port (SC)
USB cable	A1590WL	for DC power supply, Length 1 m, USB Type A - USB Type micro B
Strap	B8105EP	—

Application software

Model	Suffix codes	Descriptions
735070		AQ7932 Emulation Software (Ver. 6.01 or later)
Language	-EN -CH -KO	English Chinese Korean

NOTICE

- Before operating the product, read the user's manual thoroughly for proper and safe operation.
- Company names and product names appearing in this document are the registered trademarks of their respective companies.
- "Typical" or "Typ." in this document means "Typical value", which is for reference, not guaranteed specification.

<http://tmi.yokogawa.com/> YMI-KS-MI-SE04  
Subject to Change without notice.  
Copyright © 2017, Yokogawa Meters & Instruments Corporation  
[Ed: 01/b]  
Printed in Japan, 703(KP)

E-mail: tmi@us.yokogawa.com  
E-mail: tmi@nl.yokogawa.com  
E-mail: tech@ysh.com.cn  
Facsimile: +86-21-6880-4987  
Facsimile: +82-2-2628-3899  
Facsimile: +65-6241-9919  
Facsimile: +91-80-2852-1442  
Facsimile: +7-495-737-78-69

E-mail: TMI@sg.yokogawa.com  
E-mail: tmi@in.yokogawa.com  
E-mail: info@ru.yokogawa.com  
Facsimile: +973-17-336100

E-mail: help.ymatmi@bh.yokogawa.com